



ULTRAIR™ ROOM AND DUCT MOUNTED ODOR CONTROL SYSTEMS

IF THE SWEET SMELL OF SUCCESS IS STARTING TO SMELL A LITTLE FOUL, INSTALL AN ULTRAIR™ ODOR CONTROL SYSTEM AND HELP MAKE ODORS A THING OF THE PAST!



ULTRAIR MODEL V-100B SPACE ODOR CONTROL UNIT

- * INSTALLATION IS QUICK AND EASY
- * NO COMPRESSED AIR REQUIRED
- * NO MESSY ANNOYING SPRAYS
- * NO CONFUSING TIMERS TO ADJUST
- * QUIET - VARIABLE SPEED FAN
- * 18 GAUGE WELDED STEEL CABINET
- * OFF WHITE POWDER COAT FINISH
- * UNIT LOCKS FOR LIMITED ACCESS
- * ENERGY EFFICIENT...DRAWS LESS THAN 1 AMP
- * AVAILABLE IN 120/1/60 AND 240/1/50 VOLTS
- * UNIT WEIGHT 17 POUNDS (empty)
- * UNIT LIQUID CAPACITY - 9 QUARTS
- * ONE YEAR LIMITED WARRANTY
- * DIMENSIONS - 11 1/4" W x 7 1/4" D x 12 1/2" H


MODEL V-100B ROOM UNIT

HOW AN ULTRAIR MODEL V-100B ODOR CONTROL SYSTEM WORKS...

Air is drawn into the ULTRAIR™ Unit by the variable speed fan located at the top of the unit. The air is then passed through a reservoir of NON-FLAMMABLE, NON-TOXIC, ENVIRONMENTALLY SAFE and COMPLETELY BIO-DEGRADABLE ODOR COUNTERACTANT. Through a row of openings located in the cabinet door, the air is then discharged into the room to quickly NEUTRALIZE, NOT MASK the MALODORS. The release of the odor counteractant can be adjusted not only by the fans variable speed control switch, but also by a group of five adjustable dampers that allow precise control over the amount of air that passes through the reservoir. The units fully hinged door is equipped with a lock and key allowing limited access to its large capacity reservoir, which slides forward with ease for removal and refilling.

A FEW APPLICATIONS...

* ANIMAL ROOMS	* HEALTH CLUBS	* NURSING HOMES
* BATHROOMS	* HOSPITALS	* RECYCLING FACILITIES
* CADAVER ODORS	* INDOOR AIR QUALITY	* RESEARCH CENTERS
* COMPACTOR AREAS	* LABORATORIES	* TOBACCO SMOKE
* FECES	* LAUNDRY ROOMS	* URINE
* FOOD ODORS	* MANUFACTURING	* VETERINARY
* GARBAGE ODORS	* MEDICAL WASTE STORAGE	* ..AND MANY MORE!

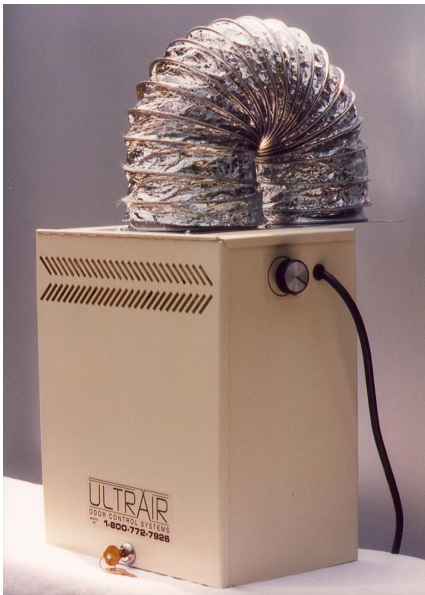

ULTRAIR MODEL M-DM DUCTED ODOR CONTROL UNIT

- * INSTALLATION IS QUICK AND EASY
- * NO COMPRESSED AIR REQUIRED
- * NO MESSY ANNOYING SPRAYS
- * NO CONFUSING TIMERS TO ADJUST
- * QUIET - VARIABLE SPEED FAN
- * 18 GAUGE WELDED STEEL CABINET
- * OFF WHITE POWDER COAT FINISH
- * UNIT LOCKS FOR LIMITED ACCESS
- * ENERGY EFFICIENT...DRAWS LESS THAN 1 AMP
- * AVAILABLE IN 120/1/60 AND 240/1/50 VOLTS
- * UNIT WEIGHT 17 POUNDS (empty)
- * UNIT LIQUID CAPACITY - 9 QUARTS
- * ONE YEAR LIMITED WARRANTY
- * DIMENSIONS - 11 1/4" W x 7 1/4" D x 13" H
- * SUPPLIED WITH 2 COLLARS, 2 TIES AND 6 FEET OF FABRI-FLEX

MODEL M-DM DUCTED UNIT

HOW AN ULTRAIR MODEL M-DM DUCTED ODOR CONTROL SYSTEM WORKS...

Air is drawn into the ULTRAIR™ Unit through a row of openings located in the cabinet door. The air is then passed through a reservoir of NON-TOXIC, NON-FLAMMABLE, ENVIRONMENTALLY SAFE and COMPLETELY BIO-DEGRADABLE ODOR COUNTERACTANT. The Model M-DM is an Add-On Unit, discharging odor counteractant directly into the HVAC, Air Cleaning or General Exhaust System it is serving to quickly NEUTRALIZE, NOT MASK the MALODORS. The release of the odor counteractant can be adjusted not only by the fans variable speed control switch, but also by a group of five adjustable dampers that allow precise control over the amount of air that passes through the reservoir. The units fully hinged door is equipped with a lock and key allowing limited access to its large capacity reservoir, which slides forward with ease for removal and refilling.



ULTRAIR AUTO-FIL™ SYSTEM (optional)

Refilling an UltraAir Unit is fast and easy...but in situations where even the smallest amount of free time is hard to come by, we offer our units with an Auto-Fil™ option. Our Auto-Fil™ system monitors the unit's level of odor counteractant 24 hours a day, 7 days a week and automatically refills itself as needed..so you don' t have to.

BryCoSystems

Bryant Companies

252 Grange Hall Road • Dalton, MA 01226
Toll Free: 1-800-772-7926 Fax: 413-684-3206
www.brycosystems.com